PIX Testing Facilities

Raw Material Testing Facilities



Universal Testing Machine



Mooney Viscometer


Raw Material Testing Facilities

RM:

- 1) Raw Rubber
- 2) Rubber chemical
- 3) Carbon Black & other Fillers

Capacity

Max. Temp:250 °C

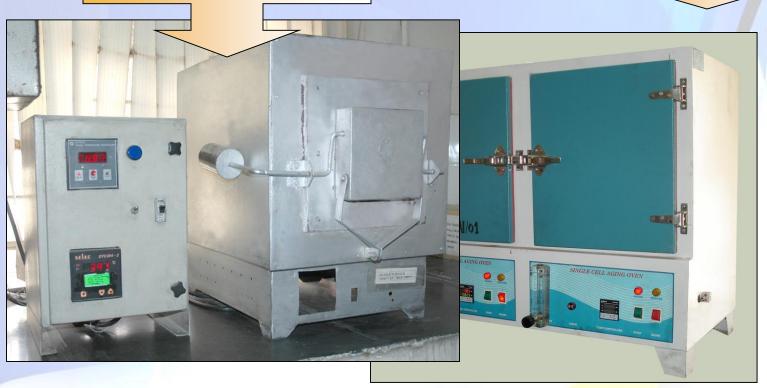

Muffle Furnace

Ageing Oven



Adhesion Testing

Tensile Testing



Capacity

Temp.: Max. 250 °C

(High Temperature Resistance)

Ageing Oven

Capacity
Temp.: -45 °C



(Low Temperature Resistance)


Cold Chamber



Test Rigs for belt validation



Flex Test-Rig (90-120 kW)

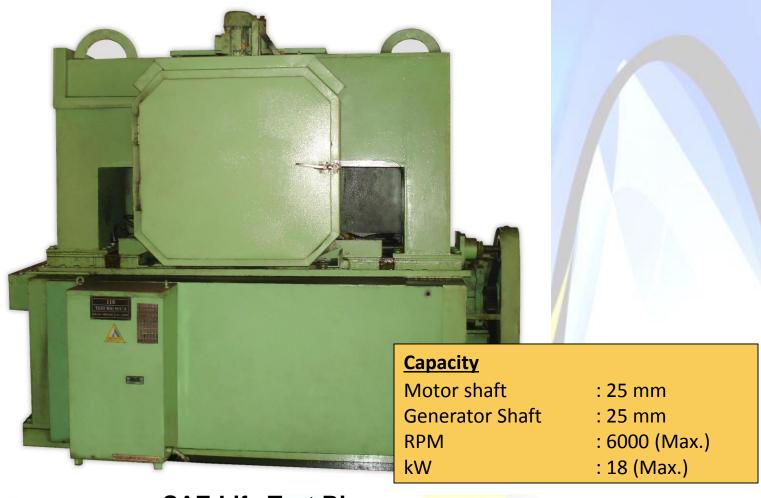

SAE Life Test Rig

